



Precision Points

Concrete 04



010000

09.21.2026

Embed Placement

ACI 301, Section 2.3.1.12, Embedded items are NOT to be placed in after the or during the concrete pour.

These items must be pre-located, verified for height and X/Y location.

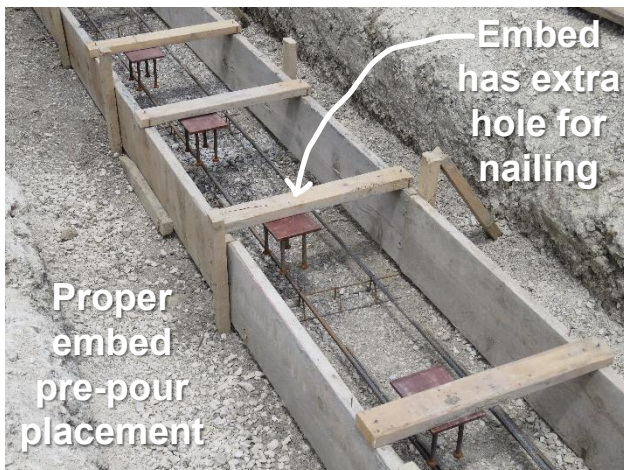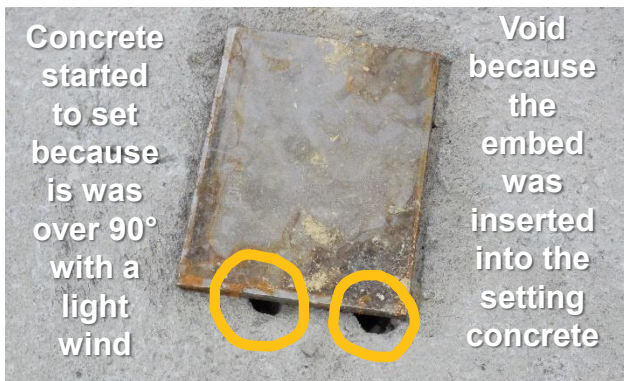

There are issues that arise out of incorrectly placed embeds when the Trade Contractor does not follow the specifications and/or ACI embed placement requirements. This issue will affect schedule and cost a lot of money to correct.

We should not accept mucking in the embeds.

Please discuss with your concrete contractor early in the process to set expectations at the beginning.